

2026



CAM CATALOGUE (MINIMUM ENVIRONMENTAL CRITERIA)

SINCE 1992

Trafil®

TRANSFORMING PLASTIC FOR A BETTER FUTURE





Scan the QRCode
to download the catalogue

MINIMUM ENVIRONMENTAL CRITERIA



FIRE-RESISTANT



WATER-RESISTANT



CUSTOMIZED



LIGHTWEIGHT




THE RECYCLABILITY OF THIS PRODUCT IS SUBJECT TO
THE CONDITIONS AND THE COLLECTION/RECYCLING
FACILITIES AVAILABLE IN THE LOCAL AREA



Trafilgreen®

The entire ECO product line is Trafilgreen and complies with the CAM
(Minimum Environmental Criteria)

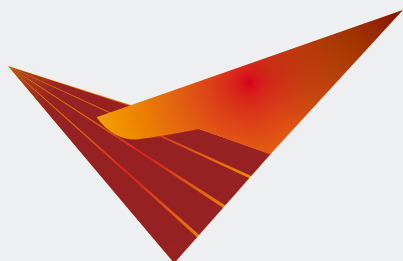

Trafil® SINCE 1992

Trafil and Trafilgreen are registered trademarks of **Trafilplast S.r.l.**



TRAFIL


Quality, innovation and respect for the environment

Since 1992, we have been producing thermoplastic articles, stamping and extruding them for the construction market, as well as for the school and hospital sector, with a special focus on the DIY market, with a focus on quality and sustainability.

Our production site in Osasio (TO) is powered by renewable energy, while production waste (by-products) is recovered and reintroduced into the production cycle. This is not a recent decision: we have been investing in these practices for years, long before they were required by law.

This philosophy gives rise to TRAFILGREEN, the ECO product line made of recycled PVC derived from pre- and post-consumer materials: a concrete commitment that paves the way for more responsible and sustainable technical solutions.



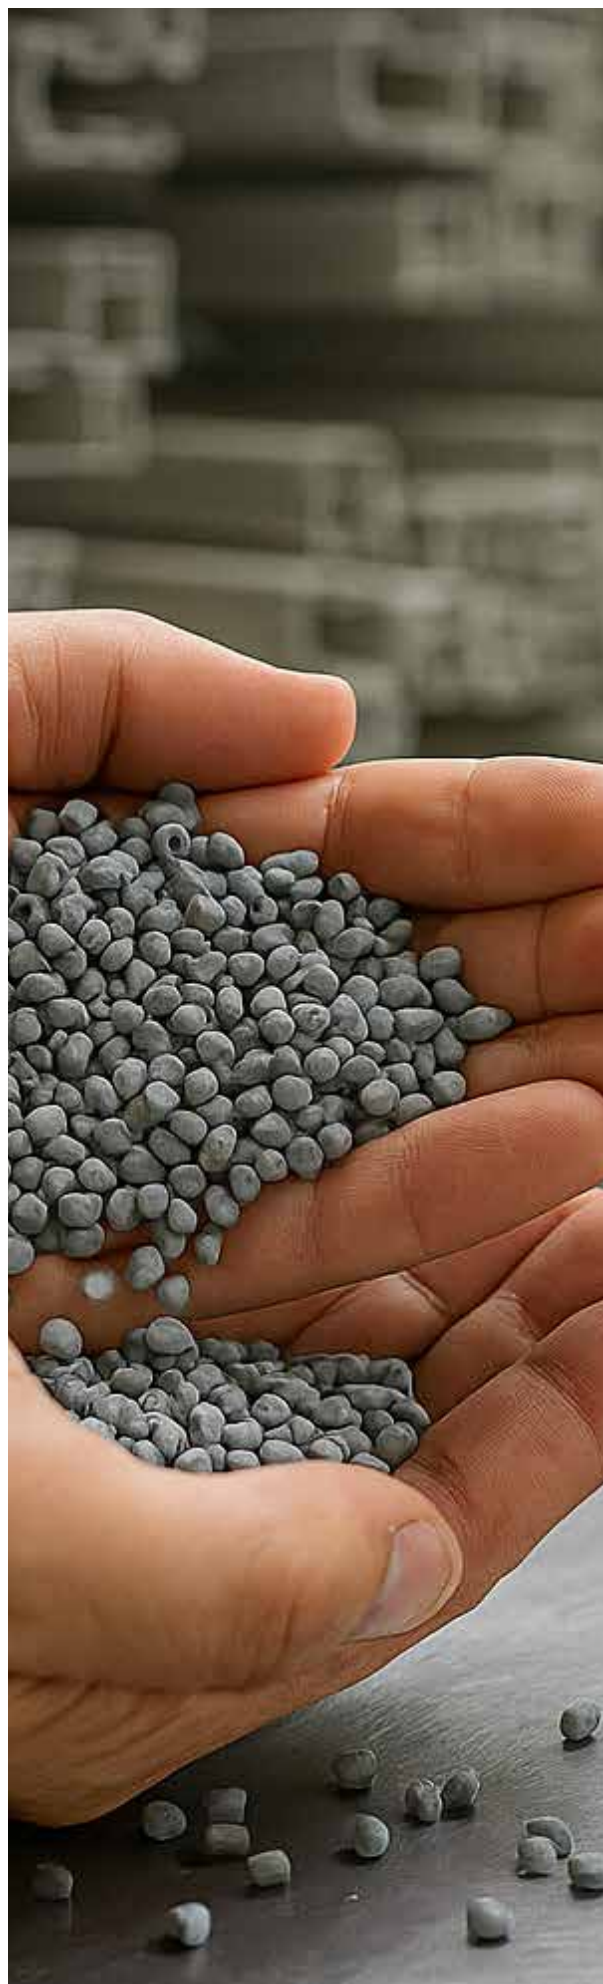

CAM: why they matter to us too

The Minimum Environmental Criteria (CAM), introduced in various sectors by the Ministry of the Environment, find specific reference for the construction industry in the Ministerial Decree of 11 October 2017 and subsequent updates, which define the requirements for reducing the environmental impact of public procurement:

- use of recycled and recyclable materials
- guarantee of durability and safety
- promotion of the circular economy

Why are they important to TRAFIL?

Because they represent our way of working: materials designed to last, responsible production processes and resource recovery. The entire ECO (Trafilgreen) line complies with CAM standards and offers safe and durable solutions for public and private construction.



**Minimum
Environmental
Criteria**



CAM PRODUCTS

Always available

The following recycled PVC profiles
are always in stock.

They are compliant with Minimum
Environmental Criteria, and they are ideal
for the construction industry, schools, public
spaces and sustainable finishing works.

CAM CONSTRUCTION PRODUCT


Square skirting board ECO



Back PIECO
smokey oak



Close-up of PIECO
smokey oak corners

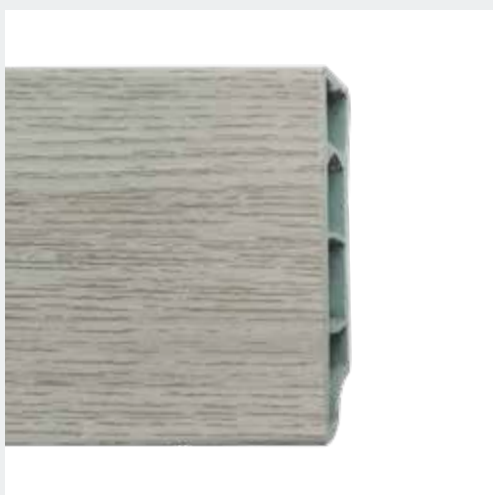

SQUARE SKIRTING BOARD ECO

Material: recycled PVC

Type: Covered skirting board 70

Height: 70 mm


Base width: 14 mm

Use: skirting board. It can be used as flush-skirting board for plasterboard walls.

Pack: 25 meters

Bars: 2,5 meters

Code: PIECO



CAM CONSTRUCTION PRODUCT

Round skirting board ECO



ROUND SKIRTING BOARD ECO

Material: recycled PVC

Type: Covered skirting board 70

Height: 70 mm

Base width: 12 mm

Use: skirting board

Pack: 25 meters

Bars: 2,5 meters

Code: **P2ECO**



CAM CONSTRUCTION PRODUCT

Rectangular profile ECO







ECO PVC colors: 1 white melange; 2 brown; 3 anthracite grey

RECYCLED PVC RECTANGULAR PROFILE ECO

Material: recycled PVC

Section: 65 × 35 mm

Thickness: 3 mm | Pack: 5 pieces | Bars: 3 meters

Use: The profile can be used for DIY work, as a separator, divider, laminated partition walls, equipped walls, sunbreaks, fences, borders, garden containers, recycling bins.

Simple and intuitive assembly. Cut, drill, glue. Can be used both

vertically and horizontally. Suitable for indoor and outdoor use, UV-resistant, water- and moisture-resistant, sanitizable, self-extinguishing and easy to work with.

Care and maintenance: it requires no special maintenance. Easily cleaned using ordinary neutral detergents. Do not use abrasive materials, sponges or cloths to avoid scratching the surface.

Code: R14ECO



ECO PVC colors: 1 white melange; 2 brown; 3 anthracite grey

RECYCLED PVC RECTANGULAR PROFILE ECO - R15ECO

Material: recycled PVC

Section: 108 × 18 mm

Thickness: 2 mm | Pack: 27 meters | Bars: 3 meters

Use: The profile can be used for DIY work, construction work, partitions, laminated walls, equipped walls, sunshades, privacy screens, fences, borders, garden planters and recycling bins.

Assembly is extremely simple and intuitive. Constructions can be made with quick and easy assembly.

Cut, drill, glue. Can be used both vertically and horizontally.

Special accessories are available: aluminium U terminal and aluminium U profile that can be used as a terminal or to join several rectangular profiles.

Maintenance-free, washable and sanitised. Also suitable for outdoor use, UV-protected, water and moisture resistant, self-extinguishing and easy to work with. The durability and strength of the materials ensure a long service life. Unlike wood, it requires no maintenance.

Code: R15ECO



Some ideas on how they can be used



Tool sheds
and wood stores



Doghouse



Borders and containers
or roof gardens



Boxes and containers




Fencing, enclosure and privacy screen




Wall partitions

CAM CONSTRUCTION PRODUCT

Round profile ECO

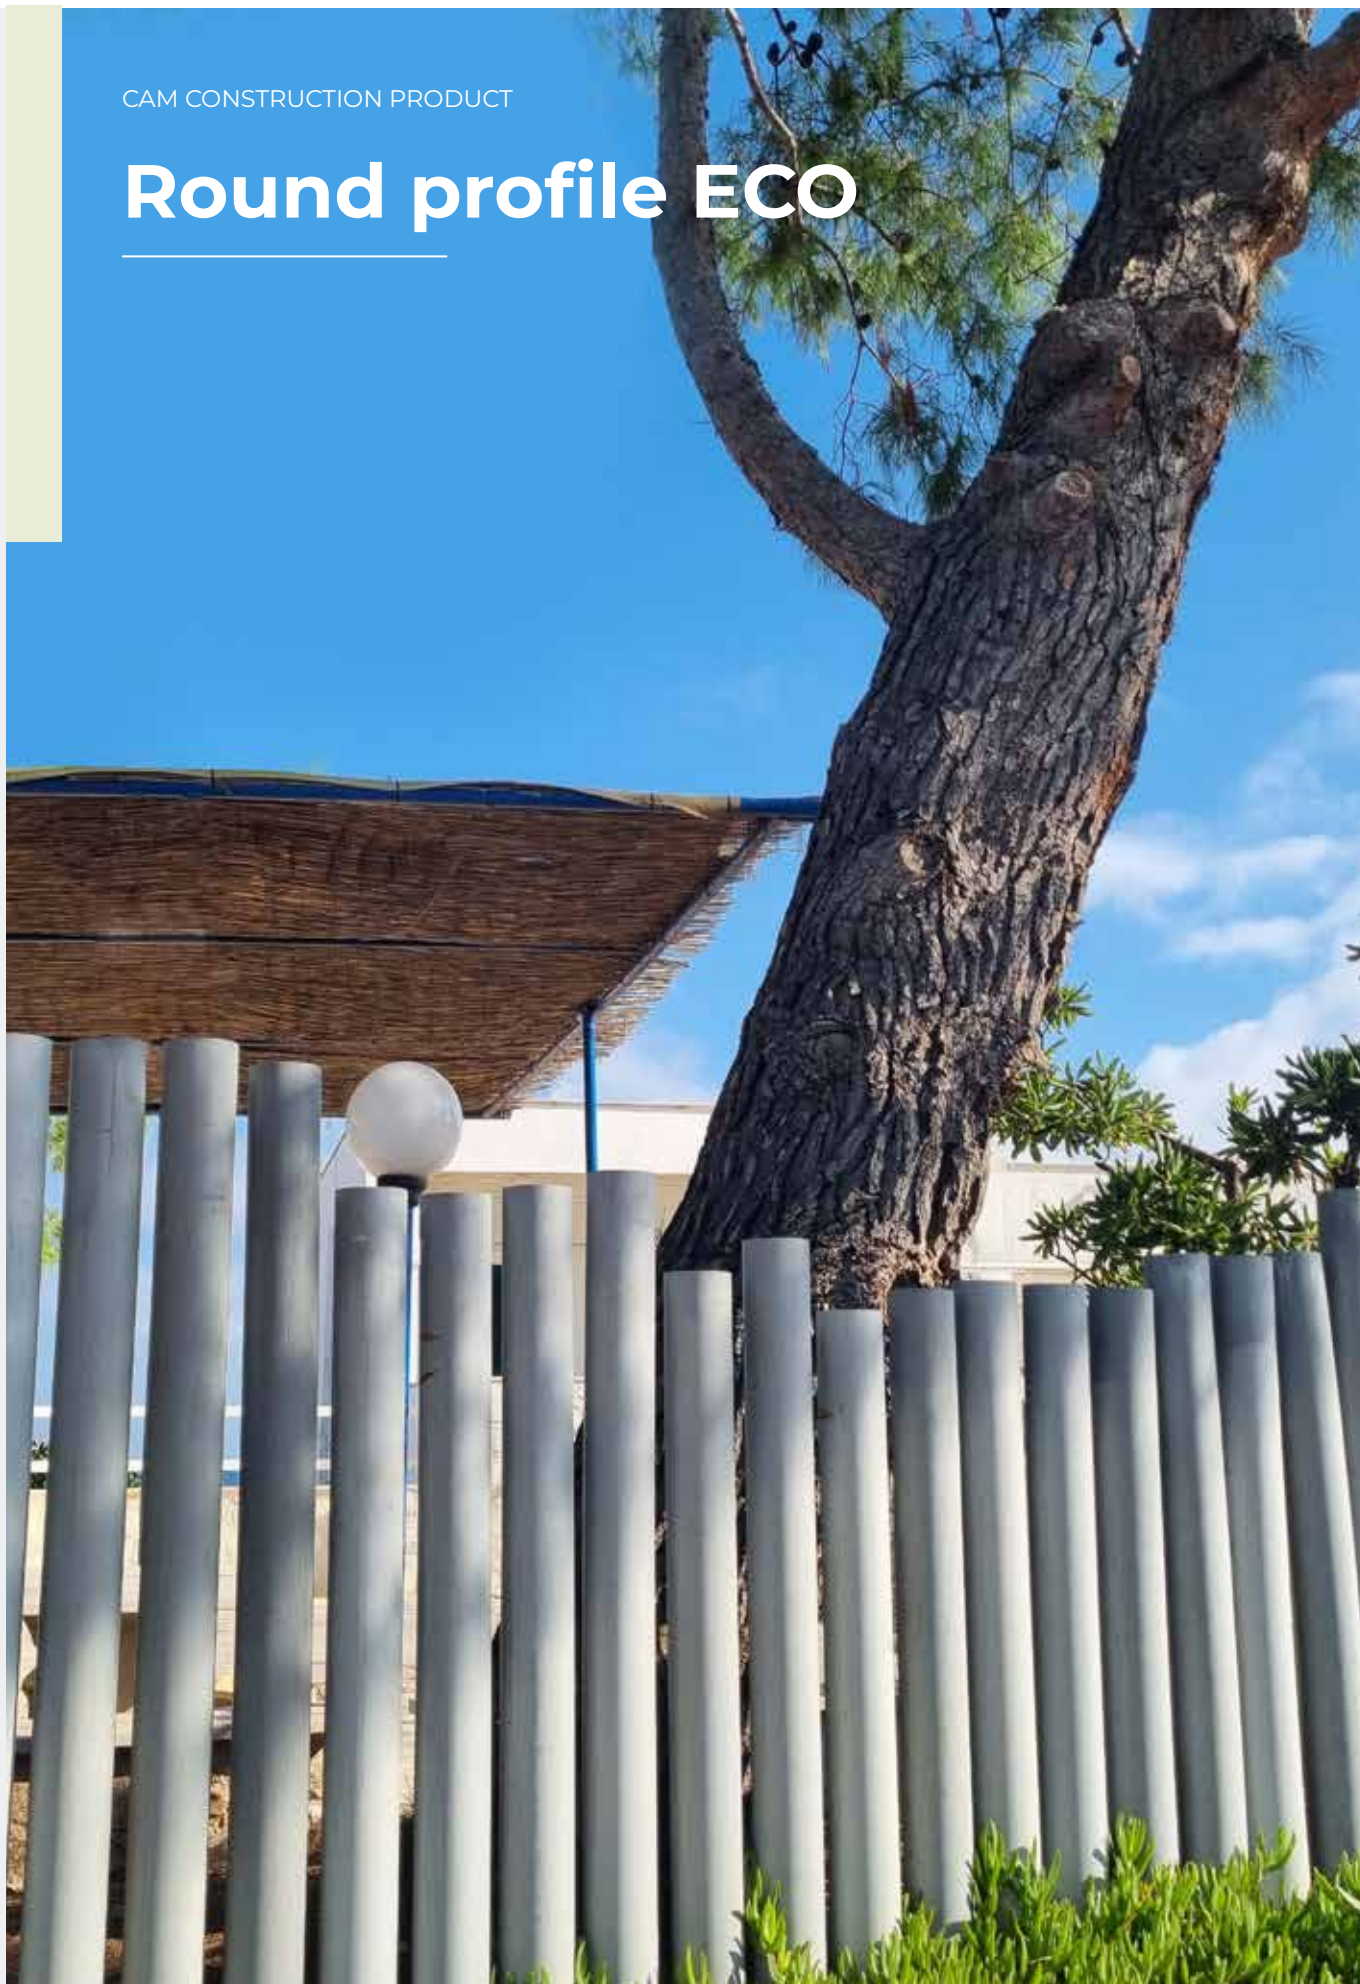

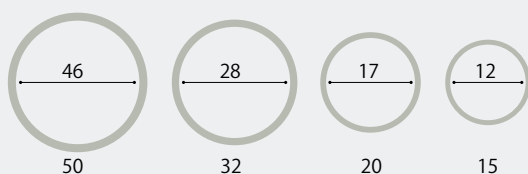

ECO PVC colors: 1 white melange; 2 brown; 3 anthracite grey

RECYCLED PVC ROUND PROFILE ECO

Code: TU50ECO

Length: 2 meters | Thickness: 2 mm

Diameter: 50 mm | Pack: 5 pieces

Use: stands, shelves, bookcases, fences, partitions, privacy screens and many other items.

Terminals and a swivel terminal kit are available, complete with all the accessories required for adjustable fitting, ensuring easy installation without the need to drill into the mounting surface. The length can be adjusted by cutting to size using a circular cutter.

It is maintenance-free and can be disinfected. It is also suitable for outdoor use and is resistant to water and moisture. It is robust and easy to work with. The durability and strength of the materials ensure a long service life.

Code: TU32ECO

Length: 2 meters | Thickness: 2 mm

Diameter: 32 mm | Pack: 5 pieces

Use: stands, fences, partitions, privacy screens and many other items.

Terminals and a swivel terminal kit are available, complete with all the accessories required for adjustable fitting, ensuring easy installation without the need to drill into the mounting surface. The length can be adjusted by cutting to size using a circular cutter.

It is maintenance-free and can be disinfected. It is also suitable for outdoor use and is resistant to water and moisture. It is robust and easy to work with. The durability and strength of the materials ensure a long service life.

Code: TU20ECO

Length: 2 metri | Thickness: 1,5 mm

Diameter: 20 mm | Pack: 5 pieces

Use: Versatile uses; with just a few simple steps, you can create simple and easily adaptable structures.

All you need is a circular cutter, a tape

measure, PVC glue, a screwdriver and some screws.

It requires no maintenance and can be disinfected. It is also suitable for outdoor use, as it is resistant to water and moisture. It is robust and easy to work with. The durability and strength of the materials ensure a long service life.

Code: TU15ECO

Length: 2 meters | Thickness: 1,5 mm

Diameter: 15 mm | Pack: 5 pieces

Use: Versatile uses; with just a few simple steps, you can create simple and easily adaptable structures.

All you need is a circular cutter, a tape measure, PVC glue, a screwdriver and some screws. It requires no maintenance and can be disinfected. It is also suitable for outdoor use, as it is resistant to water and moisture. It is robust and easy to work with. The durability and strength of the materials ensure a long service life.

CAM INTERIOR FURNISHINGS PRODUCT

Safety and thermal protection barriers



SAFETY AND THERMAL PROTECTION BARRIERS

Tube-shaped CTT ECO

The tube-shaped structure is manufactured in non-toxic, acrovynil and fireproof PVC (Class V0) guaranteeing safety and stability.

External structure:

Tube of Ø 50 mm | Thickness 2 mm

Internal structure:

Tube of Ø 32 mm | Thickness 2 mm

The distance between the vertical tubes complies with the international standard UNI 108090 to guarantee the impossibility to pass through the barrier. Hot air distribution is assured by an open structure.

Use

Perfect for protecting children from accidental bumps, these radiator guards are ideal for environments such as:

- Schools
- Kindergartens
- Playground
- Baby parking
- Game rooms

Installation and assembly

The system is modular, adaptable to the required dimensions. The brackets are designed to be secure, impossible for children to open, and the interlocking fittings are white and blue, providing a uniform appearance.

Cleaning:

Clean with water and neutral detergents to maintain hygiene and safety.

They can be custom-ordered to perfectly suit your needs.



External structure: Tube of Ø 50 mm

Available in white

Internal structure: Tube of Ø 32

Available in white

Fittings: white and blue

FITTINGS COLORS



STRUCTURE COLORS



CAM CONSTRUCTION PRODUCT

Shelled skirting board



SHELLED SKIRTING BOARD

Material: Expanded PVC shelled skirting board

Height: 80 mm | Length: 14 mm

Thickness: 2,7 mm | Pack: 100 meters | Bars: 2 meters

Use: shelled skirting board ideal to connect the wall with the floor.

Recommended applications: food, hospital and chemical sectors (butchers, kitchens, laboratories, hospitals, bathrooms, etc.)

Code: Z16ECO

80

2,7

80

14

Color range for expanded PVC



Our plastic material is totally waterproof, smooth, washable and disinfectable.

It does not release chemicals under normal conditions of use and is not affected by the use of traditional detergents and degreasers.



CAM CONSTRUCTION PRODUCT

Made to order

The following profiles are made from expanded PVC that meets CAM requirements but are not held in stock. They can be supplied to order, subject to the minimum order quantity specified in the product description.


Delivery times: approximately 2 weeks from order confirmation.

Please contact us to check availability, customisation options and the latest delivery times:

T. (39) 011.97.93.103 | export@trafil.it

CAM CONSTRUCTION PRODUCT


Skirting board

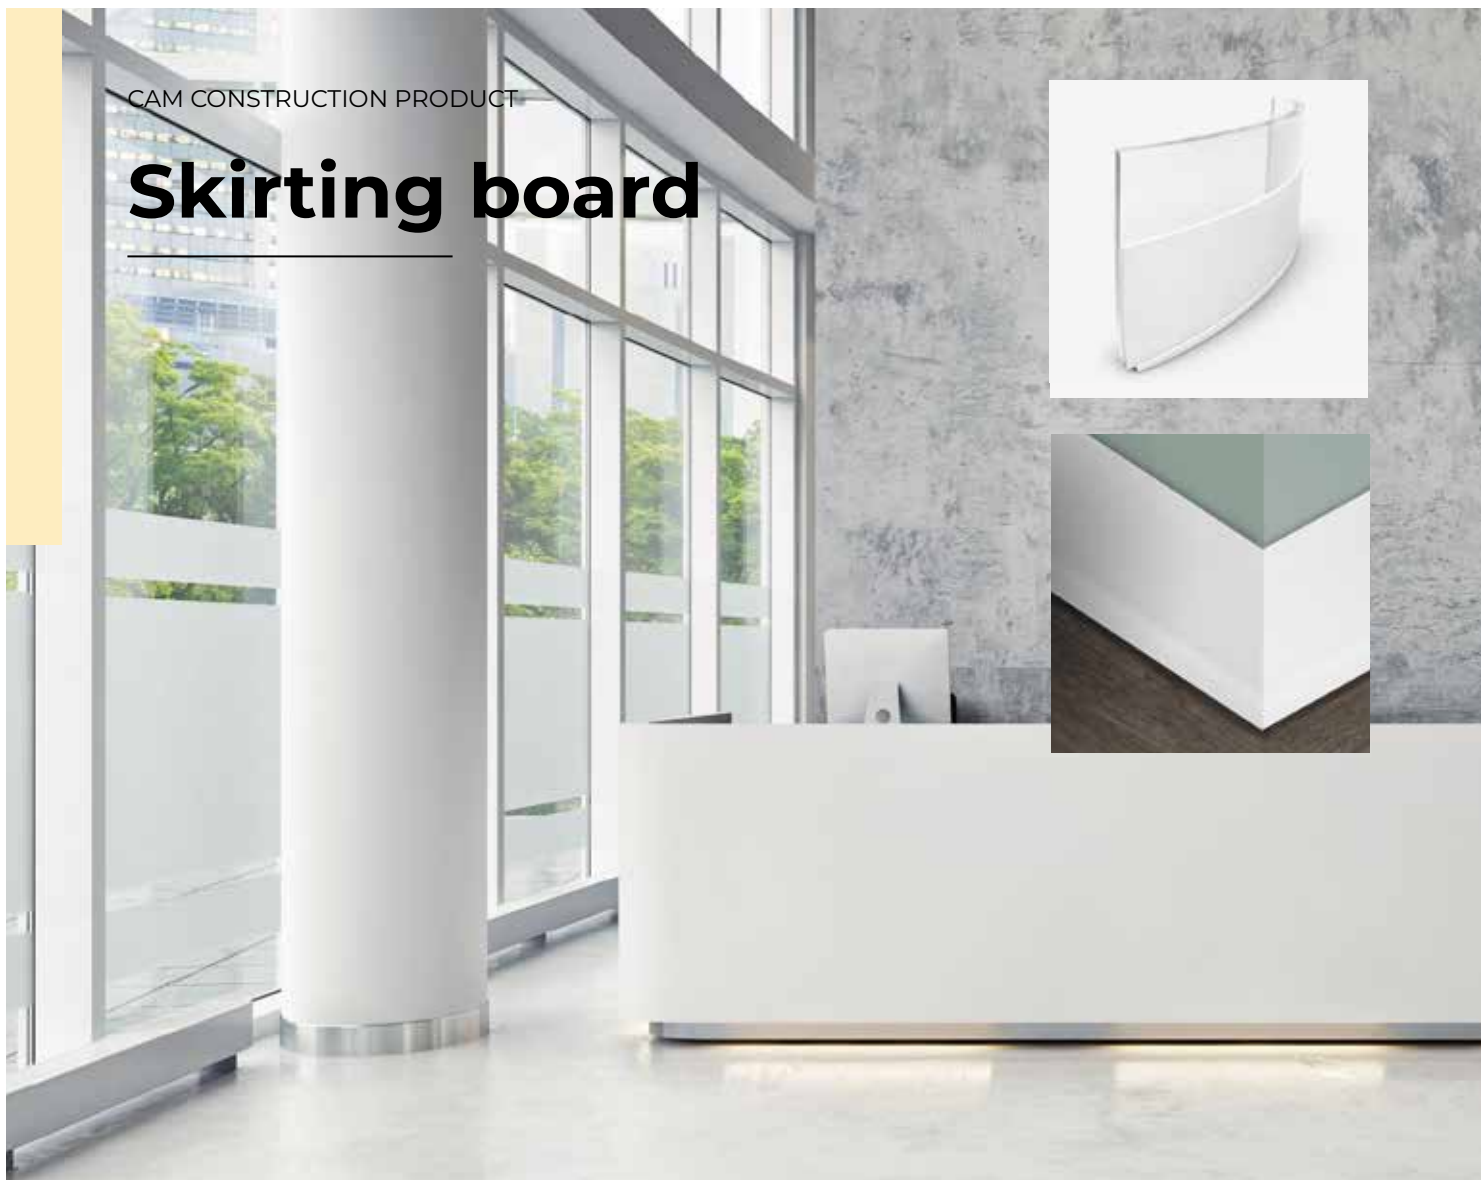

STANDARD SKIRTING BOARD

Material: expanded PVC
 Height: 65 mm | Base length: 5 mm
 Thickness: 3 mm | Pack: 200 meters | Bars: 2 meters
 Minimum order: 800 meters
 Use: skirting board
Code: ZIECO

65



5

Color range for expanded PVC





Color range for expanded PVC



STANDARD SKIRTING BOARD

Material: expanded PVC


Height: 70 mm | Base width: 7 mm

Thickness: 2 mm | Pack: 200 meters | Bars: 2 meters

Minimum order: 800 meters

Use: skirting board

Code: Z7ECO

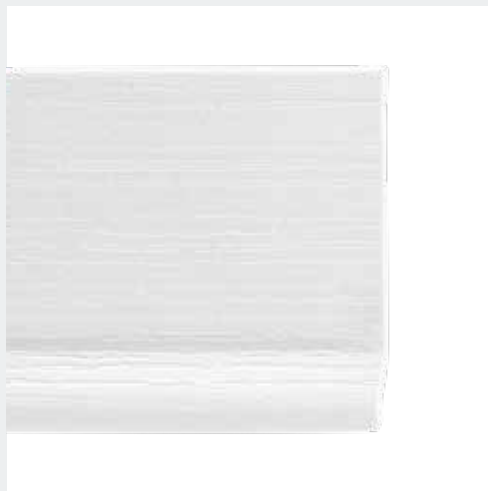

Color range for expanded embossed PVC



EMBOSED SKIRTING BOARD

Material: Expanded PVC


Height: 70 mm | Base length: 7 mm

Thickness: 2 mm | Pack: 200 meters | Bars: 2 meters

Minimum order: 800 meters

Use: skirting boards

Code: G7ECO



STANDARD SKIRTING BOARD

Material: Expanded PVC


Height: 75 mm | Base width: 10 mm

Thickness: 3 mm | Pack: 160 meters | Bars: 2 meters

Minimum order: 800 meters

Use: skirting board

Code: Z9ECO



Color range for expanded PVC





Color range for expanded PVC



SHELLED SKIRTING BOARD

Material: Expanded PVC shelled skirting board

Height: 70 mm | Length: 15 mm

Thickness: 2,7 mm | Pack: 100 meters | Bars: 2 meters

Minimum order: 800 meters

Use: shelled skirting board ideal to connect the wall with the floor

Recommended applications: food, hospital and chemical sectors (butchers, kitchens, laboratories, hospitals, bathrooms, etc.)

Code: Z17ECO



Color range for expanded PVC



STANDARD SKIRTING BOARD

Material: expanded PVC

Height: 60 mm | Length: 10 mm

Thickness: 2,6 mm | Pack: 200 meters | Bars: 2 meters

Minimum order: 800 meters

Use: skirting board

Code: Z18ECO



Material suitable for food processing environments, hospitals, social care and healthcare facilities in general.

Our plastic material is totally waterproof, smooth, washable and disinfectable. It does not release chemicals under normal conditions of use and is not affected using traditional detergents and degreasers.

CAM CONSTRUCTION PRODUCT

Multisystem skirting board



Color range for expanded PVC



STANDARD MULTISYSTEM

Material: expanded PVC

Type: PVC Multisystem cable feed-through skirting board

Height: 70 mm | Base length: 12 mm

Thickness: 3 mm | Pack: 50 meters | Bars: 2 meters

Minimum order: 800 meters

Applications:

1) with clips; 2) with glue for PVC

Use: cable feed-through skirting board. It can also be used on pre-finished floors thanks to its base width

Code: Z13ECO


Color range for expanded embossed PVC



EMBOSSED MULTISYSTEM— G13ECO

Material: expanded PVC

Type: PVC Multisystem cable feed-through skirting board

Height: 70 mm | Base width: 12 mm

Thickness: 3 mm | Pack: 50 meters | Bars: 2 meters

Minimum order: 800 meters

Applications:

1) with clips; 2) with glue for PVC

Use: cable feed-through skirting board. It can also be used on pre-finished floors thanks to its base width

Code: G13ECO


CAM CONSTRUCTION PRODUCT

Standard corner cover




Color range for expanded PVC



STANDARD CORNER COVER

Material: smooth PVC
 Dimensions: 24 × 24 mm | Thickness: 2,5 mm
 Pack: 180 meters | Bars: 3 meters
 Minimum order: 1080 meter
 Use: protection and finishing profile
Code: Z2ECO

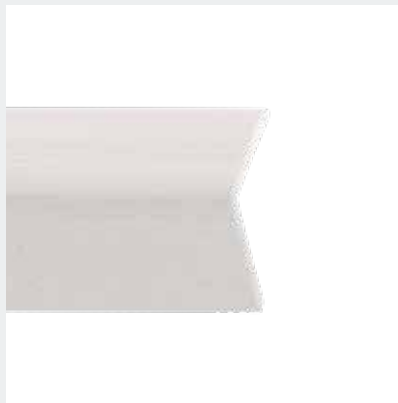


Color range for expanded embossed PVC



EMBOSSSED CORNER COVER

Material: PVC
 Dimensions: 24 × 24 mm | Thickness: 2,5 mm
 Pack: 180 meters | Bars: 3 meters
 Minimum order: 1080 meters
 Use: protection and finishing profile
Code: G2ECO





Color range for expanded PVC



STANDARD CORNER COVER

Material: smooth PVC
 Dimensions: 30 × 30 mm | Thickness: 3,5 mm
 Pack: 150 meters | Bars: 3 meters
 Minimum order: 1050 meters
 Use: protection and finishing profile
Code: Z8ECO




Color range for expanded embossed PVC



EMBOSSSED CORNER COVER

Material: PVC
 Dimensions: 30 × 30 mm | Thickness: 3,5 mm
 Pack: 150 meters | Bars: 3 meters
 Minimum order: 1050 meters
 Use: protection and finishing profile
Code: G8ECO



Color range for expanded PVC



STANDARD CORNER COVER

Material: smooth PVC
 Dimensions: 50 × 50 mm | Thickness: 3 mm
 Pack: 90 meters | Bars: 3 meters
 Minimum order: 1080 meters
 Use: protection and finishing profile
Code: Z15ECO




Color range for expanded PVC



STANDARD CORNER COVER

Material: smooth PVC
 Dimensions: 20 × 20 mm | Thickness: 2,8 mm
 Pack: 180 meters | Bars: 3 meters
 Minimum order: 1080 meters
 Use: protection and finishing profile
Code: Z19ECO

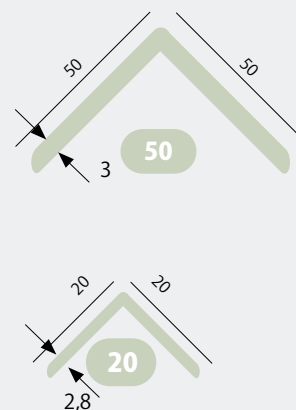

Trafil[®]
SINCE 1992

Via Peschiere, 52 - 10040
Osasio (TO) ITALY
T. (39) 011.97.93.103
export@trafil.it

trafil.it

